REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

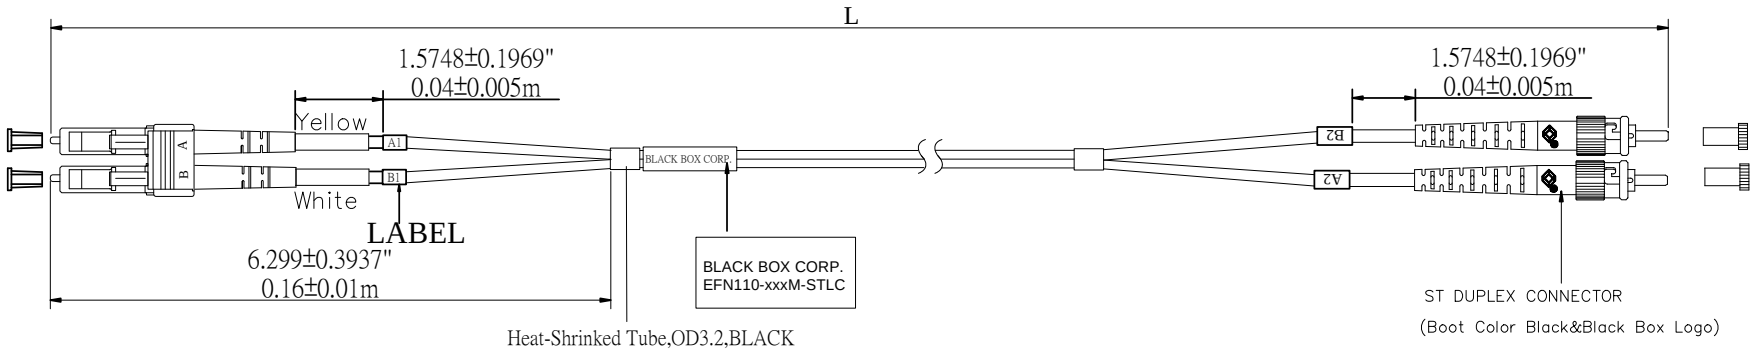

Test Label

P/N	EFN110-xxxM-STLC		
S/N	Client Numbers(P/O)-Serial Number -N		
ST/LC;62.5/125;[Length]M			
DUPLEX FIBER OPTIC CABLE			
INSERTION LOSS			
A1	dB	B1	dB
A2	dB	B2	dB

ST CONNECTOR SET

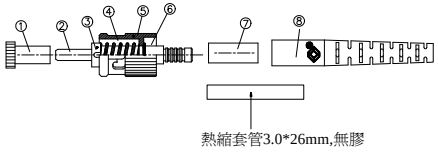

N0	PART NAME
1	DUST CAP
2	MM 127 μm FERRULE
3	FLANGE
4	SPRING
5	COUPLING NUT
6	WASHER
7	CRIMP
8	BOOT(black)

LC CONNECTOR SET

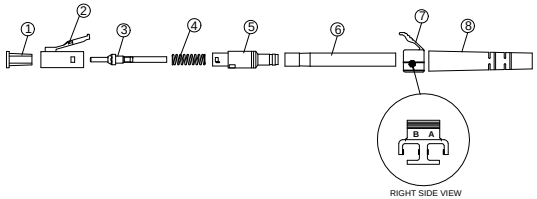

N0	PART NAME
1	DUST CAP
2	PLUG HOUSING(BEIGE)
3	BARREL/FERRULE
4	SPRING
5	EXTENDER CAP DUPLEX
6	CRIMP SLEEVE
7	CLIP(BEIGE)
8	BOOT (WHITE)

Specification

1.Cable Marking:BLACK BOX CORPORATION GUARANTEED FOR LIFE (724) 746-5500-MULTIMODE FIBER PATCH CABLE-ZIPCORD MMF-62.5/125 OFNR-(UL) E223839 xx/xxxx xxxxM

2.Fiber:Multimode 62.5/125um Optical Fiber

3.Fiber cord:PVC(OFNR CLASS) 2.0*4.2mm ,Color Orange

4.Operating wavelength:850nm

5.Insertion Loss:≦ 0.3dB

DWN	Yangli	17Mar2006
CHK		17Mar2006
APVD		17Mar2006
UNIT: mm		

NAME: 2.0*4.2mm Orange PVC ST-LC 62.5/125 Patchcord

DRAWING NO.: EFN110-xxxM-STLC

BLACK BOX	SCALE	SHEET	OF	REV
	NTS	1	1	0